


**SE375 - ALUMINUM DISCUS CIRCLE  
(FOR 3/4" [19mm] DEPRESSED PAD)**

SportsEdge®  
Troutman, NC 800-334-6057

**SE375 - ALUMINUM DISCUS CIRCLE  
DEPRESSED PAD INSTALLATION**

**INSTRUCTIONS FOR CIRCLE ASSEMBLY AND FORMS PLACEMENT**


- LAY CIRCLE SECTIONS OUT END TO END ON A FLAT SURFACE. CHECK TO ENSURE THAT THE UPPER EDGES OF BOTH SECTIONS ARE FLUSH WITH EACH OTHER.
- LOCATE THE CENTER OF THE CIRCLE AND THE PAD WITH RESPECT TO THE TRACK AND MARK THE REQUIRED SECTOR LINES TO PROPERLY ORIENT THE PAD.
- POSITION THE FORMS AS SHOWN. THE TOP OF THE FORMS SHOULD BE LEVELED 3/4" (19MM) ABOVE THE DESIRED THROWING SURFACE HEIGHT. RULES REQUIRE THE THROWING SURFACE TO BE ON THE SAME LEVEL AS THE LANDING AREA.

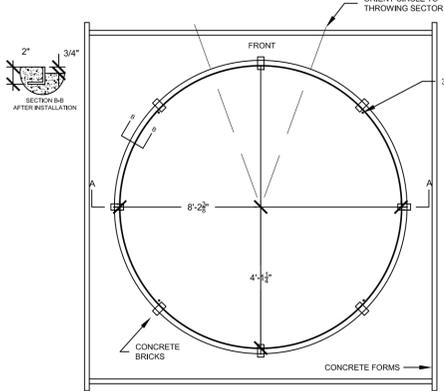



THE SE375 ALUMINUM DISCUS CIRCLE IS DESIGNED TO BE INCORPORATED INTO CONCRETE TO FORM A 3/4" (19MM) DEEP DEPRESSED PAD. THE CIRCLE CONSISTS OF TWO HALF SECTIONS FABRICATED FROM 2" X 2" X 1/4" (50.8MM X 50.8MM X 6.35MM), 6063-T5 ALUMINUM 90 CORNER ANGLE. THIS CIRCLE MEETS NFHS, NCAA, AND IAAF SPECIFICATIONS.

**INSTRUCTIONS FOR SETTING CIRCLE AND POURING PAD**

- POSITION THE CIRCLE IN THE CENTER OF THE FORMS AS SHOWN IN SECTION A-A #1. THE TOP EDGE OF THE CIRCLE MUST BE HELD EVEN WITH THE TOP OF THE FORMS. IF ARTIFICIAL TRACK SURFACE IS TO BE INSTALLED AROUND THE CIRCLE, THE TOP EDGE OF THE CIRCLE MUST BE EVEN WITH THIS SURFACE. THE CIRCLE FORMS SHOULD BE LOWERED TO MATCH THE THICKNESS OF THE SURFACE TO BE INSTALLED.
- INSTALL (4) 3/4" DRAINS. POSITION THE DRAINS TO THE SIDE OF THE CIRCLE. DRAINS MUST NOT INTERFERE WITH THE ATHLETE'S THROW.
- POUR AND LEVEL CONCRETE IN THE CENTER OF THE CIRCLE 3/4" (19MM) BELOW THE TOP EDGE OF THE CIRCLE AS SHOWN IN SECTION A-A #2. FINISH POURING CONCRETE OUTSIDE THE CIRCLE TO THE TOP OF THE CIRCLE OR TO THE REQUIRED LEVEL FOR AN ARTIFICIAL SURFACE.

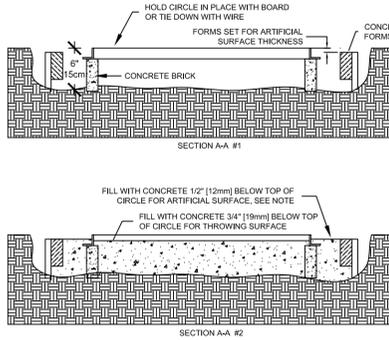


NOTE: FOR ARTIFICIAL TRACK SURFACES, THE DISTANCE THE CONCRETE IS FINISHED BELOW THE TOP OF THE CIRCLE SHOULD MATCH THE THICKNESS OF THE SURFACE TO BE INSTALLED.

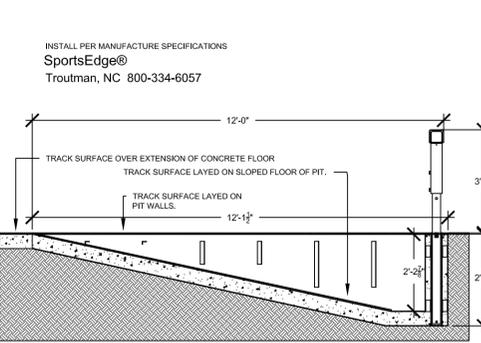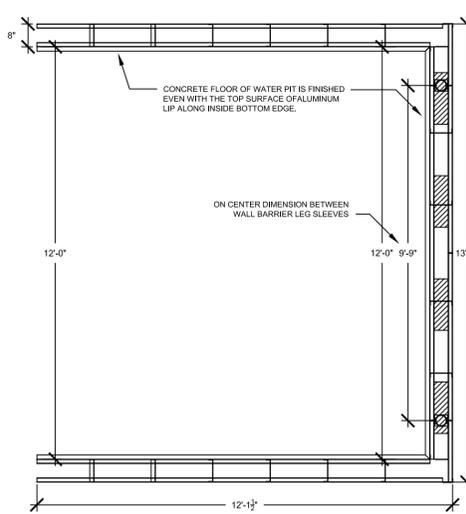


INSTALL PER MANUFACTURE SPECIFICATIONS  
SportsEdge®  
Troutman, NC 800-334-6057

THIS DRAWING INCORPORATES THE NEW UNIVERSAL SC UPPER LEG WITH CORRESPONDING CHANGES TO THE LOWER SLEEVED LEG AND FORM SLEEVES

**O DISCUS RING  
D10 NTS**

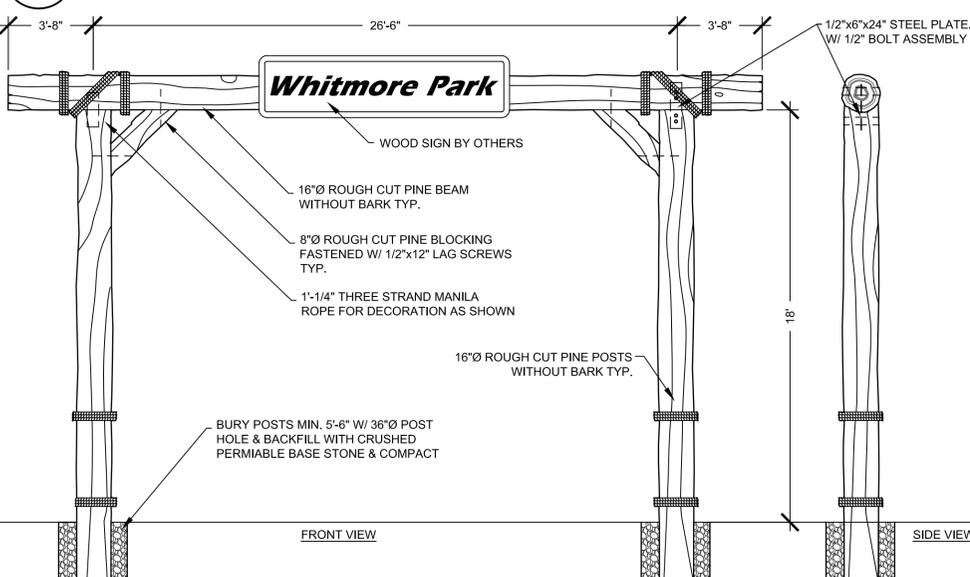


**P STEEPLE WATER BARRIER  
D10 NTS**

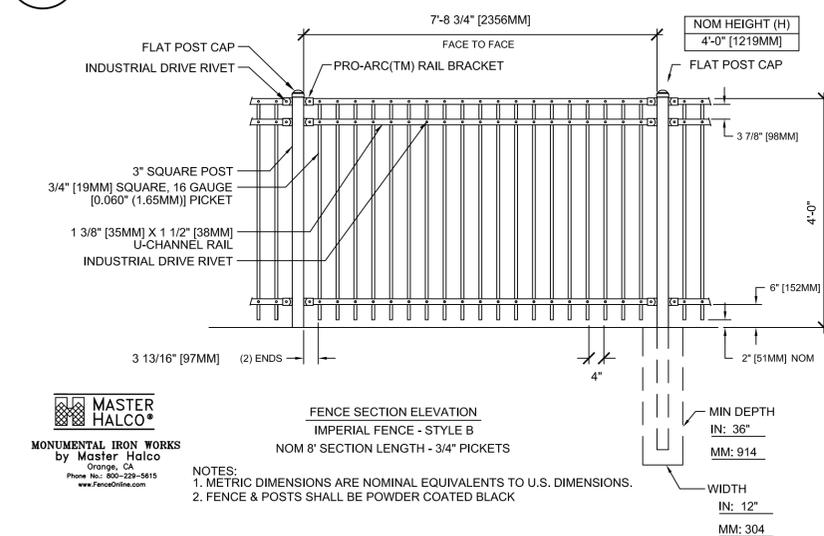

MASTER HALCO®  
MONUMENTAL IRON WORKS  
by Master Halco  
Orange, CA  
Phone No: 800-229-5415  
www.FenceOnline.com


NOTES:  
1. METRIC DIMENSIONS ARE NOMINAL EQUIVALENTS TO U.S. DIMENSIONS.  
2. FENCE & POSTS SHALL BE POWDER COATED BLACK

**S QUICK COUPLER VALVE  
D10 NTS**

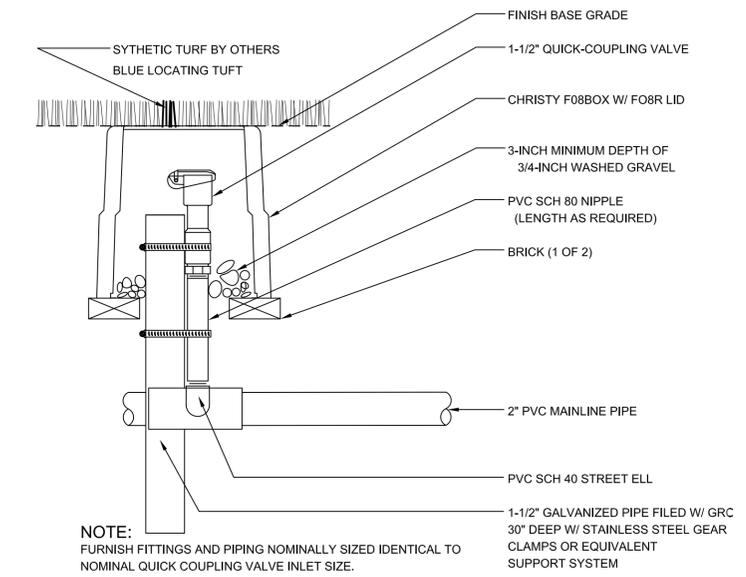


NOTE:  
FURNISH FITTINGS AND PIPING NOMINALLY SIZED IDENTICAL TO NOMINAL QUICK COUPLING VALVE INLET SIZE.


**Q ENTRY SIGN  
D10 1/4\"/>**

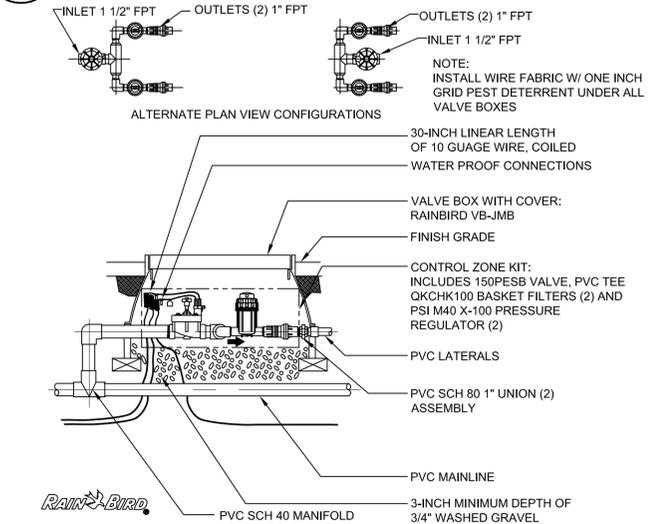


**R 48\"/>**

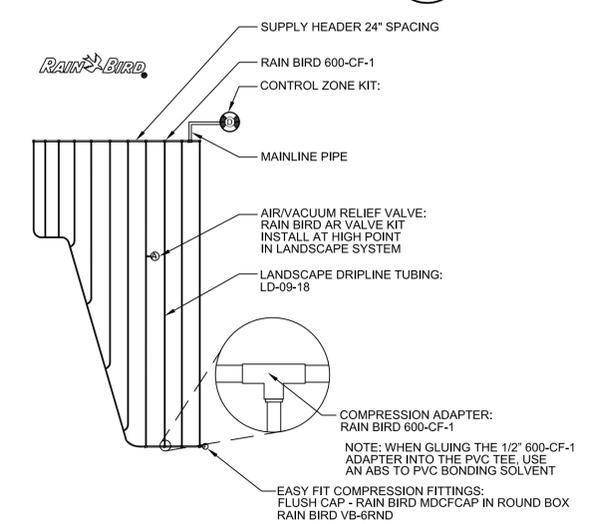


**U DRIPLINE CONFIGURATION  
D10 NTS**

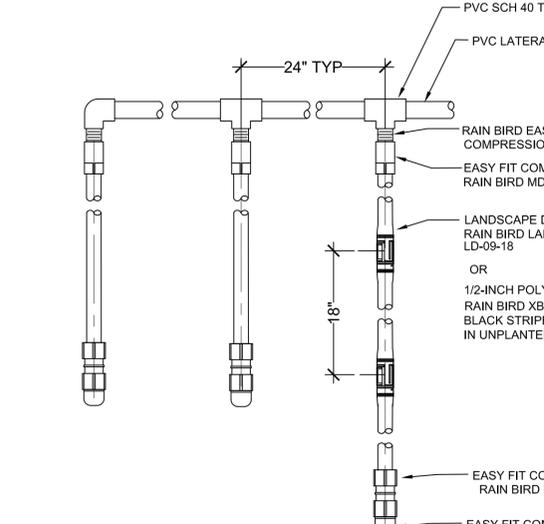

**V DRIPLINE CONNECTION  
D10 NTS**

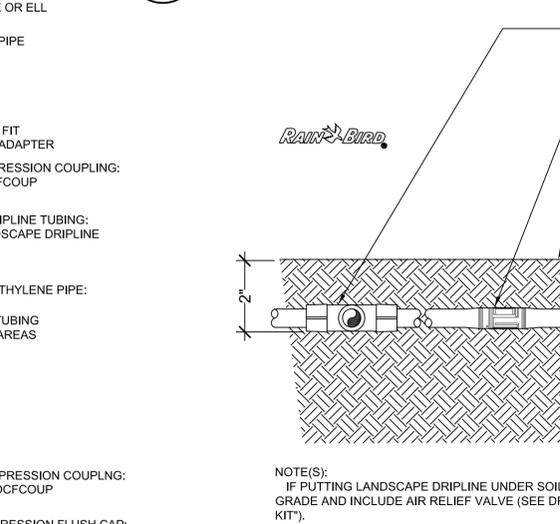

**W DRIPLINE TUBING  
D10 NTS**

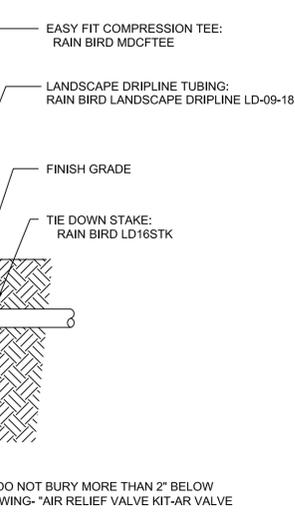

NOTE(S):  
IF PUTTING LANDSCAPE DRIPLINE UNDER SOIL, DO NOT BURY MORE THAN 2\"/>

REVISIONS:	BY:

--

